


# GSL30

# GSL60

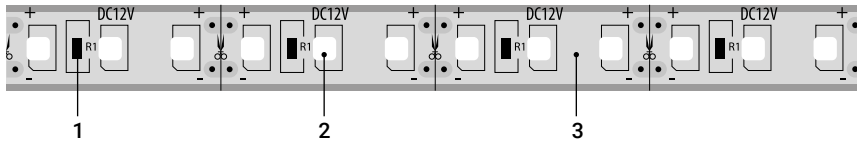


## FLEXIBLE STRIPS

1. Resistance
2. LED
3. Flexible PCB


### Technical data

	<b>GSL30</b>	<b>GSL60</b>
Voltage	240 V ac	240 V ac
Power	3.2 W/m	6.4 W/m
Flux	300 lm/m	600 lm/m
Protection	with accessories GSLC002, GSLC003 e GSLC004 IP 65	
Operating temperature	-40 ... +70°C	-40 ... +70°C
UV rating	F1	F1
Flame retardant	V0	V0
Resistant class	UL94	UL94
Anti-glare treatment	market standard UGR <25	
Beam angle	120°	120°
Shaft area	3.5 m <sup>2</sup>	9.2 m <sup>2</sup>
Coil	300 m	300 m
Cutting points distance	1.5 m	1 m

#### GSL30

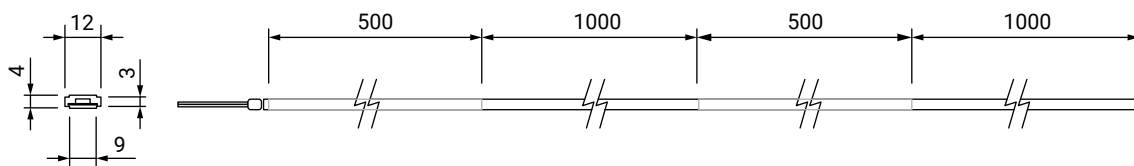

#### GSL60

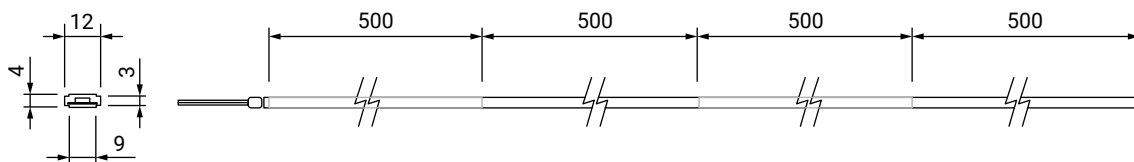

- VOC free (Volatile Organic Compound).
- Silicone has excellent resistance to oil, solvents and other chemicals.
- High flexibility and mechanical resistance.
- Dimmable & flickerless with PF > 0.85.
- Different lengths available.
- As a safety measure, a maximum of 16 A circuit-breaker, category B is required.